

# PP600H AC PowerPack

AC/DC Converter to Supply PS600, PS1200HR and specific PS1800HR Pump Systems with Backup Power from a Generator or Mains Supply

## ORDER INFORMATION

- Item no.: 19-001040    **product name:** Power Pack 600H, UL
- Item no.: 19-001060    **product name:** Power Pack 600H SS, UL (SS stainless steel enclosure)

## TECHNICAL DATA

- AC input: 120V or 240V ( $\pm 15\%$ ), selectable, 47 to 63Hz
- AC input current: 6.2A (120V) or 3.1A (240V)
- PV input voltage:  $V_{mp}$ : 130V DC, depending on pump controller max. voltages
- PV max open circuit voltage: 200V DC depending on pump controller max. voltages
- DC output: 120V DC (no load), 700W
- Overload protection: internal fuse, 15A
- Enclosure: steel, gasket-sealed, indoor-use, hinged front cover with key-lock
- Must be protected from direct mid-day sun
- Enclosure class: IP22
- Ambient temperature: max. 45°C
- All wires must be #14 AWG (2.5 mm<sup>2</sup>) or larger
- Manual with further information is available in PartnerNet
- Meets the requirements for CE




Electrical Safety



## DIMENSION/WEIGHT

- Packaging dimensions: 450 x 300 x 140 mm  
17.7 x 11.8 x 5.5 in
- Total weight: 16 kg / 35 lbs

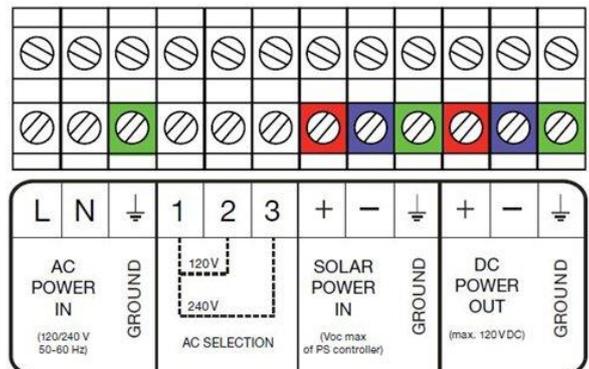

**BERNT LORENTZ GmbH & Co. KG**  
Siebenstuecken 24, 24558 Henstedt-Ulzburg, Germany  
Tel +49 (0)4193 8806-700, [www.lorentz.de](http://www.lorentz.de)

**Sun. Water. Life.**

All specifications and information are given with good intent, errors are possible and products may be subject to change without notice. Pictures may differ from actual products depending on local market requirements and regulations.